

# Trimline 38 series

FRONT, CORNER AND PANORAMIC



## Product specifications

### FEATURES

-  Balanced flue gas fire
-  Single burner
-  Front model
-  Wood logs fuel bed
-  Corner left
-  Ecomax remote control
-  Corner right
-  Antracite steel panel interior
-  Panoramic model
-  Lamelas interior

### OPTIONALS

-  Pebbles fuel bed
-  Anti reflective glass
-  Mains adapter GV60
-  Wall bracket remote control
-  Domotica smart connection
-  Wall switch
-  Set for app control
-  Puck control

### Designed for comfort

The smaller, the better! Even the smallest room in your house can be turned into the cosiest one with this fireplace. Living in a small home does not necessarily mean having fewer options. The Trimline 38 series are very compact fireplaces, making even the smallest rooms feel cosy and inviting. It creates a luxury ambience with a single press of a button. With this fireplace a direct wall termination is possible. No chimney needed.






## Styling & Optionals

Ecomax remote control  
For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.



Options interior finish materials and Trimline Wi-Fi control  
For that extra WOW factor, there is also an option to choose the pebbles fuel bed. Other available upgrades include Wi-Fi and anti-reflective glass.



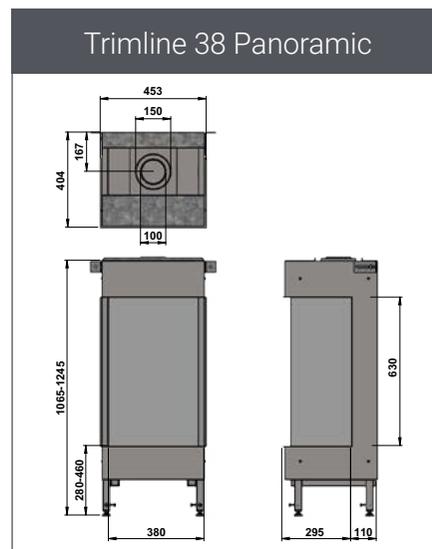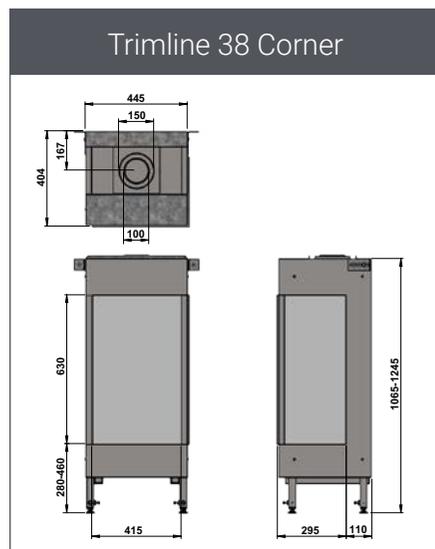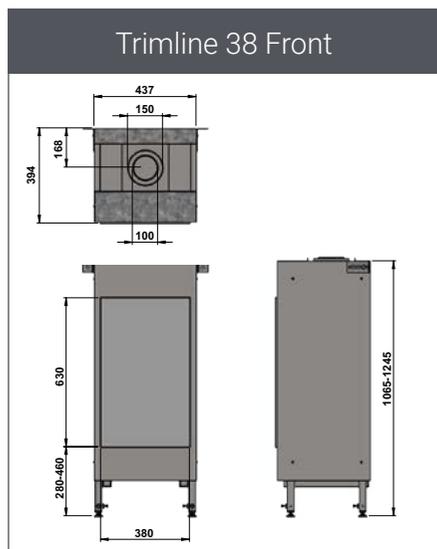

Appliance name	Trimline 38 Front/Corner/Panorama			
Appliance type	Balanced flue built-in gas fires (C11, C31, C91)			
Purpose	Ambient heating, real flames			
Engine identification	1070(F), 1071(P), 1072(CL), 1073(CR)			
Gas type-pressure	Natural gas G25.3 – 25 mbar	Natural gas G20 – 20 mbar	Natural gas G25 – 20 mbar	LPG G30/31 – 28-50 mbar
Heat input (kW)	5.9	6.4	6.7	6.0
Heat output max (kW)	5.1	5.4	5.7	5.2
Heat output min (kW)	2.7	2.8	2.6	2.5
Consumption (m <sup>3</sup> /h and kg/h LPG)	0.7	0.7	0.74	0.4
Efficiency (%)	86	85	84	87
Energy label highest efficiency	B	B	B	B
Flue lay out wall termination	Direct NG only and indirect 1m vertical and max 4m horizontal			
Weight (kg)	60			
Efficiency class EN613	1			
NOx Class	5			
PIN ID CE	0461CN1009			
Gas connection	3/8" outside connection			
Electrical connection	6VDC battery powered			
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866 mHz			
Safety	Thermocouple flame supervision and pressure hatches			
Heat distribution	Internal convection system			
Connectivity	Optional App control (Android and IOS), wall switch and domotica connection			
Flue type and diameter	Holetherm-CC concentric flue 100-150mm			
Standard supplied	Adjustable legs – Convection chamber and grills – Wall brackets – Log set			
Optional	Support iron for brickwork chimney breast			
Remarks	Always use non-combustible construction materials such as metal stud framing and fireboard cladding			

## Installation details

### Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



### Balanced flue gas fire

One of the most innovative aspects of the Trimline 38 series is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.